



# Homescape Collection

NovikStone™ DS

Design. Beauty. Tradition.



Brownstone #231



Anthracite #233



Limestone #235

With its industry-leading technology and expertise, Polaris Homescape Collection™ has created dry stack stone that is lightweight and easy to install with the amazing look and feel of a dry stack stone wall.

NovikStone™ DS - Dry Stacked Stone was designed to meet the needs of today's homeowners and contractors.

- A wide range of colors with an amazingly authentic look and feel
- Great for foundations, facades, architectural accents, gazebos and hot tub sides
- Complements a wide range of exterior products for stunning mixed material finishes
- Lightweight panels for one-person installation
- Addresses moisture management issues making it perfect for ground contact situations


## / COLORS AVAILABLE



BEIGE  
GRANITE #228



BASALT #229




BROWNSTONE  
#231



ANTHRACITE  
#233



TRAVERTINE #234



LIMESTONE #235



LAVA #236



FLINT #237





## ENHANCED PERFORMANCE FEATURES

### / What is Fast-Fit?



Features that simplify installation.



Product shown: NovikStone™ DS Limestone #235 by Polaris  
Overall dimensions: 41.5" x 13.13" (105,41 cm x 33,34 cm)  
10 panels each box: 25.18 square feet (2,34 m²)



1. **A)** Center nailing hole: helps spread the panel's expansion and contraction evenly  
**B)** Nail locators: facilitate the installation by precisely showing proper nail location
2. Staircase interlocking system: facilitates panel alignment




3. Continuous full panel interlocking system for secure and rapid installation
4. « Hammer-stopper » System: helps limit nail penetration to ensure smooth panel expansion and contraction



### 2 in 1 multifunctional corners:

Corners are available in all NovikStone™ DS colors.  
Overall dimensions:  
5.88" x 16" (14,92 cm X 40,64 cm)

## NOVIKSTONE™ PREMIUM LEDGE

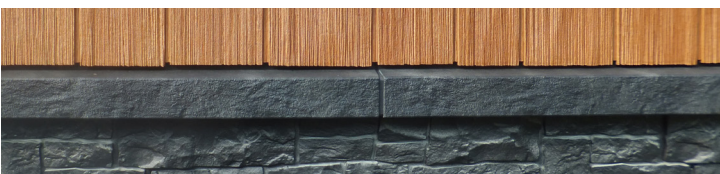

- Transition between two sidings
- Available in 3 colors, fits with all types of Novik® siding: Onyx, Weathered Blend and Gray Mortar
- Decorative ledge under a window
- 3 opening options depending on the siding thickness

### Corners available in matching colors :

\* Can also be used for finishing



## PRODUCT HIGHLIGHTS

- Extreme temperature variation resistance
- Resistance to warping, expansion, contraction and cracking
- Wind and Impact (ASTM D4226) resistance
- Resistance to discoloration (from U.V rays.)
- Flame spread < 200
- Never needs to be painted
- Lightweight material, fast and easy to install
- Authentic stone texture
- Certified testing by independent laboratories (FBC, CCMC)
- Building code listed ICC-ES#AC366

## TEST

Test	Standard testing	Result for NOVIKSTONE™ DS
Fire rating	In accordance with ASTM E84	Flame spread < 200
Impact	In accordance with ASTM D4226	>35 in-lbf
Weatherability	In accordance with ASTM D1435/G147	Pass
Wind	In accordance with ASTM D5206	Resist to wind speed of 110 MPH (177 km/h) minimum (depending on product) *

All testing in accordance with ICC-ES AC366 (Acceptance criteria for polymer siding systems)  
Product certified by independent laboratories

\* Contact Novik customer service for additional information



www.polarissiding.com

NOVIK

SHAKES, STONE AND ACCENTS  
WWW.NOVIK.COM