



# Homescape Collection

NovikStone™ SK

Design. Beauty. Tradition.



Sand Blend #224



Moka #218



Aspen #216

With its industry-leading technology and expertise, Polaris Homescape Collection™ has created stacked stone that is lightweight and easy to install with the amazing look and feel of a stacked stone wall.

NovikStone™ SK - Stacked Stone was designed to meet the needs of today's homeowners and contractors.

- A wide range of colors with an amazingly authentic look and feel
- Great for foundations, facades, architectural accents, gazebos and hot tub sides
- Complements a wide range of exterior products for stunning mixed material finishes
- Lightweight panels for one-person installation
- Addresses moisture management issues making it perfect for ground contact situations

## / COLORS AVAILABLE



ASPEN #216



SMOKE GRAY #217



MOKA #218



TERRA #219



ONYX #223



SAND BLEND #224



## ENHANCED PERFORMANCE FEATURES



### / What is Fast-Fit?


Features that simplify installation.



Product shown: NovikStone™ SK Moka #218 by Polaris  
Overall dimensions: 45" x 20.25" (114,3 cm x 51,44 cm)  
10 panels each box: 49.32 square feet (4,58 m<sup>2</sup>)



Corners are available in all NovikStone™ SK colors.  
Overall dimensions: 6.1" x 21.25" (15,49 cm X 53,98 cm)




«Nails Locators» facilitate the installation by precisely showing nail position



«Hammer-Stopper» system limits nail penetration to ensure smooth panel expansion and contraction



The center-panel nailing hole spread the panel's expansion and contraction evenly




Panels are held securely in place with extra long lock tabs that engage easily for faster and easier installation



Authentic stone finish

## NOVIKSTONE™ PREMIUM LEDGE

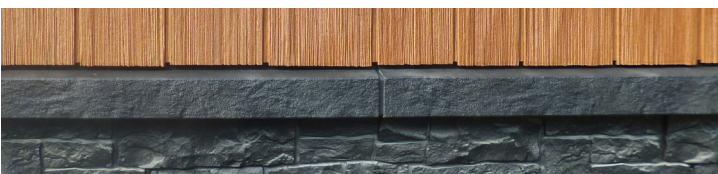

- Transition between two sidings
- Available in 3 colors, fits with all types of Novik® siding: Onyx, Weathered Blend and Gray Mortar
- Decorative ledge under a window
- 3 opening options depending on the siding thickness

### Corners available in matching colors :

\* Can also be used for finishing



## PRODUCT HIGHLIGHTS

- Extreme temperature variation resistance
- Resistance to warping, expansion, contraction and cracking
- Wind and Impact (ASTM D4226) resistance
- Resistance to discoloration (from U.V rays.)
- Flame spread < 200
- Never needs to be painted
- Lightweight material, fast and easy to install
- Authentic stone texture
- Certified testing by independent laboratories (FBC, CCMC)
- Building code listed ICC-ES AC366

## TEST

Test	Standard testing	Result for NOVIKSTONE™ DS
Fire rating	In accordance with ASTM E84	Flame spread < 200
Impact	In accordance with ASTM D4226	>35 in-lbf
Weatherability	In accordance with ASTM D1435/G147	Pass
Wind	In accordance with ASTM D5206	Resist to wind speed of 110 MPH (177 km/h) minimum (depending on product) *

All testing in accordance with ICC-ES AC366 (Acceptance criteria for polymer siding systems)  
Product certified by independent laboratories

\* Contact Novik customer service for additional information



www.polarissiding.com

NOVIK

SHAKES, STONE AND ACCENTS  
WWW.NOVIK.COM